

## CALIPER SPECIFICATIONS


### ZR24 Series Caliper Monobloc - 4 Piston - 2 Pad

# ZR24


Common Application: F3 / V de V

| Application                             | F3 / V de V            |
|-----------------------------------------|------------------------|
| Mount Dim. (mm)                         | 120 x 40               |
| Piston sizes (mm)                       | 25.5/29.0              |
| Piston area per side (mm <sup>2</sup> ) | 1171.22                |
| Max disc dia (mm)                       | 284                    |
| Max disc thickness (mm)                 | 20                     |
| Min disc thickness (mm)                 | 18                     |
| Max pad thickness (mm)                  | 18                     |
| Fluid capacity (cm <sup>3</sup> )       | 32.3                   |
| Max operating pressure                  | 103bar / 1500psi       |
| Pad Shape                               | 7835, 7827, 7943, 7878 |
| Pad area per side (cm <sup>2</sup> )    | 28.13, 30.64           |
| Caliper weight                          | 1.25kg / 2.8lbs        |
| Handing                                 | Caliper Part #         |
| Leading Left                            | 24.284.255.290.03      |
| Leading Right                           | 24.284.255.290.04      |
| Trailing Left                           | 24.284.255.290.13      |
| Trailing Right                          | 24.284.255.290.14      |

#### Pad Shape

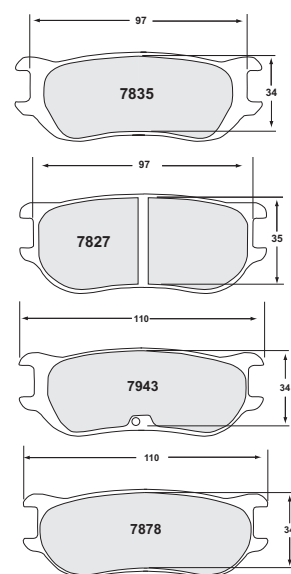

See Pad comparison chart for thickness options and compound availability

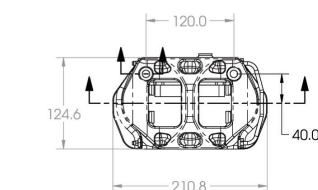

| 24.284.255.290.XX |           |                  |              |               |
|-------------------|-----------|------------------|--------------|---------------|
| Rotor OD (mm)     | Pad Shape | Eff. Radius (mm) | 'H' Dim (mm) | 'PL' Dim (mm) |
| 284.0             | 7827      | 124.5            | 99.9         | 42.1          |
| 271.0             | 7835      | 119.5            | 88.7         | 46.8          |

